

Governor Tony Evers Dawn Crim, Secretary

Department of Safety and Professional Services
Division of Industry Services
Plumbing Product Review
4822 Madison Yards Way
P.O. Box 7162
Madison, Wisconsin 53707-7162
Phone 608-266-2112
Web http://dsps.wi.gov

Email dsps@wisconsin.gov TTY: Contact Through Relay

April 10, 2017

Revised 11/2/2020

Geometry Systems LLC Elizebeth Potts 114 Mill Rock Road East Old Saybrook CT 06475 Synergy Systems Tom Donahoe 75D Golf Parkway Madison WI 53704

Re: Description: POWTS Component Manual Manufacturer: Geometry Systems LLC

Product Name: Synergy Systems LLC, Geomat Mound Component Manual

Model Number(S): Edition 1, 2017 (Revised 2020) eSLA PTO No.: PP-061600072-PTOVPCR

The specifications and/or plans for this plumbing product have been reviewed and determined to comply with chapters SPS 382 through 384, Wisconsin Administrative Code, and Chapters 145 and 160, Wisconsin Statutes.

The Department hereby issues an approval based on the Wisconsin Statutes and the Wisconsin Administrative Code. This approval is valid until the end of April 2022.

This approval is contingent upon compliance with the following stipulation(s):

- This approval recognizes that POWTS systems designed, installed and maintained in accordance with this manual will provide treatment and dispersal of domestic wastewater that is acceptable in the context of ch. 383 Wis. Adm. Code.
- > Systems installed in accordance with this POWTS Component Manual shall use wastewater tanks approved by the department. If a given tank is approved and meets the published specifications contained in the manual, then redundant approval of the tank is not required. The installation shall not compromise the structural integrity of the tank.
- Systems installed in accordance with this POWTS Component Manual shall be installed, maintained and used in strict accordance with the manufacturer's published instructions, Chapters 381-387 Wis. Adm. Code and this product approval. If there is a conflict between the manufacturer's instructions and the Wis. Adm. Code or this Plumbing Product Approval, then the Wis. Adm. Code and this Plumbing Product Approval shall take precedence.
- > Complete operation and maintenance instructions POWTS systems designed in accordance with this manual shall be provided to each system owner and remain onsite.
- > Systems designed in accordance with this manual shall be installed by persons holding the proper license or registration in accordance with Wis. Stats. § 145.
- > Drain, waste and vent piping used to install these systems shall conform to s. SPS 384.30 (1), (2) and (3) Wis. Adm. Code.
- Cleanouts shall be installed in drain piping associated with the installation of these systems in accordance with s. SPS 382.35 Wis, Adm. Code.
- Commercial food processing, food production, food service, restaurants, taverns and similar establishments which may generate greases, fats, oils or similar substances; shall have state-approved grease interceptors installed upstream of POWTS systems designed in accordance with this manual in accordance with s. SPS 382.34 Wis. Adm. Code.

SBD-10564-E (N.10/97) File Ref: 16017501.DOC

Geometry Systems LLC April 10, 2017 (Revised 11/2/2020) Page 2 of 2

eSLA PTO No.: PP-061600072-PTOVPCR

- > DSPS POWTS plan approval shall be obtained from the department's Private Sewage Section, or the appropriate agent county, for:
 - 1. each installation of POWTS systems designed in accordance with this manual; and
 - 2. high-strength and/or commercial POWTS systems designed in accordance with this manual.
- A sanitary permit shall be obtained, in accordance with s. SPS 383.21 Wis. Adm. Code, from the county, or other local authority having jurisdiction, for each proposed installation of systems designed in accordance with this manual.
- A complete and acceptable soil evaluation report, conforming to s. SPS 385.40 Wis. Adm. Code, shall be performed for all proposed systems designed in accordance with this manual.

The department is in no way endorsing this product or any advertising and is not responsible for any situation which may result from its use.

Sincerely,

Glen W. Schlüeter Plumbing Product Reviewer Department of Safety and Professional Services Division of Industry Services Bureau of Technical Services (608) 267-1401 **Phone** glen.schlueter@wi.gov **E-mail** 7:45AM-4:30PM CST M-F **Work Hours**

Synergy Systems LLC GeoMat Mound Component Manual

Published by: Synergy Septic Systems 75D Golf Parkway Madison, WI 53704

Synergy Septic Systems reserves the right to revise this component manual according to changes in regulations or Geomatrix products installation instructions.

Edition 1 2017

Revised 2020

TABLE OF CONTENTS

| | | Page |
|-------|--|------|
| I. | Introduction and Specifications | 4 |
| II. | Description and Principle of Operation | 10 |
| III. | Definitions | 11 |
| IV. | Soil and Site Requirements | 12 |
| V. | Fill and Cover Material | 12 |
| VII. | Design | 13 |
| VII. | Site Preparation and Construction of Mound | 24 |
| VIII. | Mound Worksheets | 28 |
| IX. | Mound Worksheets (example) | 34 |
| X. | Plan Submittal | 40 |
| X1. | Inspection Report | 42 |

APPENDIX

The following documents are submitted as an attachment to Synergy Systems GeoMat Mound
Under the title: Synergy GeoMat Mound Test Data
In compliance with: Voluntary POWTS component review in accordance with s SPS 384.10 (3)
No. 4. Testing Data.

- A. GeoMat NSF 40 Certification
- A1. GeoMat NSF 40 Final Report
- A2. Onsite Wastewater Technology Testing Report

I. INTRODUCTION AND SPECIFICATIONS

This component manual provides design, construction, inspection, operation, and maintenance specifications for GeoMat Mound Component as provided by Synergy Systems, a Wisconsin Based LLC.

These items must accompany a properly prepared and reviewed plan acceptable to the governing unit to help provide a system that can be installed and function properly.

When designed, installed and maintained in accordance with this manual, the GeoMat Mound provides treatment and dispersal of domestic wastewater in conformance with NSF/ANSI Standard 40 Class I Certification.

"To achieve NSF 40 Class I Certification, treatment systems must produce an acceptable quality of effluent during a six month (26-week) test. Class I systems must achieve a 30-day average effluent quality of 25 mg/L CBOD5 and 30 mg/L TSS or less, and pH 6.0-9.0 spanning six months of testing. System service and maintenance are prohibited during the test period."

- Plans are submitted for review and approved by the governing unit having authority over the plan for the installation.
- A Sanitary Permit must be obtained from the department or governing unit having jurisdiction.
 See Section XI for more details.

Table 1: INFLUENT FLOWS AND LOADS

| Design Wastewater flow (DWF) | ≤ 5000 gal/day |
|--|--|
| Monthly average of Fats, Oils, and Grease (FOG) | ≤ 30 mg/L |
| Monthly average value of Biochemical Oxygen Demand (BODs) | ≤ 220 mg/L |
| Monthly average value of Total Suspended Solids (TSS) | ≤ 150 mg/L |
| Design loading rate of Geomat | ≤ 2.0 gpd/sq.ft./day |
| Design loading rate of the basal area | Equals soil absorption rate of effluent with maximum average monthly values of BOD₅ and TSS of ≤30 mg/L as per SPS table 383.44-2 (Column 2) |
| Value of single dose to dispersal component | ≥5 times void volume of the distribution lateral(s) and < 20% of the wastewater flow |
| Design wastewater flow (DWF) from one and two- family dwellings | Based on SPS 383.43 (3)(4) or (5) Wis. Admin. Code |
| Design wastewater flows (DWF) from public facilities | ≥ 150% of estimated daily wastewater flow in accordance with Table 4 of this manual |
| Linear loading rate for systems with in situ soils having a soil application rate of ≤ 0.3 gpd/sq.ft./day within 12" of the surface of in-situ soils | ≤ 4.5 gal/ft/day |
| Linear loading rate for systems with in situ soils having a soil application rate of > 0.3 gpd/sq.ft./day within 12" of the surface of in-situ soils | ≤ 10 gal/ft/day |
| Filters Required: One pressure Filter Required on all pressure mound systems. Gravity filter not required on pressure systems | ≤ 1/8 inch |
| Distibution cell area per orifice` | ≤ 12 sq. ft. per orifice |
| | |

TABLE 2: SIZE AND ORIENTATION

| Distribution component cell width (A) | Maximum of three (3) 39" wide GeoMat sections |
|---|---|
| | placed side-by-side for a total of 117"; |
| | followed by 36" open area. Every 39" GeoMat |
| | section must have a individual distribution pipe |
| Total distribution cell area (A x B) a | ≥ Design wastewater flow rate ÷ design loading |
| | rate of the fill material |
| Geo Mat Distribution component cell depth (F) | 1 inch + nominal size of distribution pipe+ 12" ASTM C-33 for fine sand aggregate |
| Geo Mat Depth of Fill Material (D) | The depth of additional sand fill under the GeoMat distribution cell is based on the minimum depth of unsaturated soil required from treatment listed in Table 383.44-3 (column 2), WI Adm. Code, and table 2 of this manual. Under the 12" of sand required for the GeoMat Component, any additional sand fill that is required is on an inch-by-inch basis. So that if 24" of suitable insitu soil is available, then $D = 0$ ". If 20" of in-situ soil is available, then $D = 4$ ". |
| Depth of cover material at the top center of the distribution Pipe (H)a | ≥ 12 inches |
| Depth of cover material at the outer edge of the distribution cell (G)a | ≥ 6 inches |
| Basal area | ≥ Design wastewater flow rate ÷ Design loading rate of in-situ soil as specified in Table 1 Row 6 |
| Vertcal Separation to limiting factor | ≥ 2' as measured from bottom of Geo Mat Component. (see Figure 8) |
| Deflection of Distribution cell on concave slopes | ≤10% |

Note a: Letter corresponds to letters referenced in figures, formulas and on worksheets.

TABLE 3: OTHER SPECIFICATIONS

| | R SPECIFICATIONS |
|---|--|
| Bottom of the distribution cell | Level |
| Slope of original grade | ≤ 25% in area of the mound |
| Depth of in situ soil to high groundwater elevation and bedrock under basal area. | ≥ 6 inches |
| Horizontal separation between distribution cells | GeoMat component is 39" wide. Three (3) GeoMat sections can be placed side-by-side; totaling 117" followed by ≥ 3' separation. |
| Fill material | Sand meeting ASTM C-33 specification for fine aggregate |
| Size for basal area (for level sites) (B x W)a | Cell length x (total mound width) |
| Size for basal area (for sloping sites) (B x (A + I)a | Cell length x [(# of cells x cell width) + ({# of cells – I} x cell spacing) + down slope width] |
| Effluent application (Orifice Shields required) | By use of pressure distribution only. Conforming to sizing methods established by either Small Scale |
| | Waste Management Project publication 9.6, entitled "Design of Pressure Distribution Networks for Septic Tank - Soil Absorption Systems." Pressuer distribution component manual for onsite wastewater treatment systems Version 2.0 January 30 2001. |
| Piping material | Meets the requirements of s. SPS 384.30(2) Wis. Adm. Code for its intended use. |
| Number of observation pipes per distribution cell | 2 |
| Location of observation pipes for components | Two Observation pipes will be installed in each distribution cell. The observation pipes shall be placed 2' from the end of the GeoMat cell. (See observation pipe diagram on Page 26) |
| Maximum final slope of mound surface | ≤3:1 |
| Cover material | Soil that will provide frost protection, prevent erosion and excess precipitation or runoff infiltration and allow air to enter the distribution cell. |
| Grading of surrounding area | Graded to divert surface water around mound system. |
| Limited activities | Vehicular traffic, excavation, and soil compaction are prohibited in the basal area and 15 feet down slope of basal area, if there is a restrictive horizon that negatively affects treatment or dispersal. |

Note a: Letter corresponds to letters referenced in figures, formulas and on worksheets.

| Source | Unit | Estimated |
|--|------------------------------|--------------------------|
| | | Wastewater Flow (gpd) |
| Apartment or Condominium | Bedroom | 100 |
| Assembly hall (no kitchen) | Person (10 sq. ft./person) | 1.3 |
| Bar or cocktail lounge (no meals served) | Patron (10 sq. ft./patron) | 4 |
| Bar or cocktail lounge* (w/meals – all paper service) | Patron (10 sq. ft./patron) | 8 |
| Beauty salon | Station Station | 90 |
| Bowling alley | Bowling lane | 80 |
| Bowling alley (with bar) | Bowling lane | 150 |
| Camp, day and night | Person | 25 |
| Camp, day use only (no meals served) | Person | 10 |
| Campground or Camping Resort | Space, with sewer connection | |
| | and/or service building | 30 |
| Campground sanitary dump station | Camping unit or RV served | 25 |
| Catch basin | Basin | 65 |
| Church (no kitchen) | Person | 2 |
| Church* (with kitchen) | Person | 5 |
| Dance hall | Person (10 sq. ft./person) | 2 |
| Day care facility (no meals prepared) | Child | 12 |
| Day care facility* (with meal preparation) | Child | 16 |
| Dining hall* (kitchen waste only without dishwasher and/or food waste grinder) | Meal served | 2 |
| Dining hall* (toilet and kitchen waste without dishwasher and/or food waste grinder) | Meal served | 5 |
| Dining hall* (toilet and kitchen waste with dishwasher and/or food waste grinder) | Meal served | 7 |
| Drive-in restaurant* (all paper service with inside seating) | Patron seating space | 10 |
| Drive-in restaurant* (all paper service without inside seating) | Vehicle space | 10 |
| Drive-in theater | Vehicle space | 3 |
| Employees (total all shifts) | Employee | 13 |
| Floor drain (not discharging to catch basin) | Drain | 25 |
| Gas station / convenience store | Patron (minimum 500 patrons) | 3 |
| Gas station (with service bay) | | |
| Patron | Patron | 3 |
| Service bay | Service bay | 50 |
| Hospital* | Bed space | 135 |
| Hotel, motel or tourist rooming house | Room | 65 |
| Medical office building | | |
| Doctors, nurses, medical staff | Person | 50 |
| Office personnel | Person | 13 |
| Patients | Person | 6.5 |
| Migrant labor camp (central bathhouse) | Employee | 20 |
| Mobile Home (Manufactured home) (served by its own POWTS) | Bedroom | 100 |
| Mobile home park | Mobile home site | 200 |

Table 4 Public Facility Wastewater Flows (continued)

| Source | Unit | Estimated Wastewater Flow (gpd) |
|---|---|---------------------------------------|
| Nursing, Rest Home, Community Based Residential Facility | Bed space | 65 |
| Outdoor sport facilities (toilet waste only) | Patron | 3.5 |
| Parks (toilets waste only) | Patron (75 patrons/acre) | 3.5 |
| Parks (toilets and showers) | Patron (75 patrons/acre) | 6.5 |
| Public shower facility | Shower taken | 10 |
| Restaurant*, 24-hr. (dishwasher and/or food waste grinder only) | Patron seating space | 4 |
| Restaurant*, 24-hr. (kitchen waste only without dishwasher and/or food waste grinder) | Patron seating space | 12 |
| Restaurant, 24-hr. (toilet waste) | Patron seating space | 28 |
| Restaurant*, 24-hr. (toilet and kitchen waste without dishwasher and/or food waste grinder) | Patron seating space | 40 |
| Restaurant*, 24-hr. (toilet and kitchen waste with dishwasher and/or food waste grinder) | Patron seating space | 44 |
| Restaurant* (dishwasher and/or food waste grinder only) | Patron seating space | 2 |
| Restaurant* (kitchen waste only without dishwasher and/or food waste grinder) | Patron seating space | 6 |
| Restaurant (toilet waste) | Patron seating space | 14 |
| Restaurant* (toilet and kitchen waste without dishwasher and/or food waste grinder) | Patron seating space | 20 |
| Restaurant* (toilet and kitchen waste with dishwasher and/or food waste grinder) | Patron seating space | 22 |
| Retail store | Patron (70% of total retail area ÷ 30 sq. ft. per patron) | 1 |
| School* (with meals and showers) | Classroom (25 students/classroom) | 500 |
| School* (with meals or showers) | Classroom (25 students/classroom) | 400 |
| School (without meals or showers) | Classroom (25 students/classroom) | 300 |
| Self-service laundry (toilet waste only) | Clothes washer | 33 |
| Self-service laundry (with only residential clothes washers) | Clothes washer | 200 |
| Swimming pool bathhouse | Patron | 6.5 |

^{* =} May be high strength waste

II. DESCRIPTION AND PRINCIPLES OF OPERATION

Construction of BEST GeoMat Mound must consist of the following components

 GeoMat 3900 Flat Leaching System From Geomatrix: GeoMat is a patented soil-based treatment system that has earned NSF 40 Certification. It utilizes a hydroscopic membrane with a transmissive core. Physical properties consist of fused entangled plastic filaments with a geotextile fabric on the top and bottom.

GeoMat has a thin profile (1") that maximizes contact with the soil and enhances oxygen transfer. Together, the geotextile fabric and the entangled filament pull the water across the entire surface of the mat, maximizing oxygen transfer.

A pressure distribution line is installed on top of the core and covered with a layer of geotextile fabric. The combination of pressure dosing and flow equalization serves to reduce the peak hydraulic loading. Additionally, GeoMat can be configured with a time dose pump station for greater flow equalization.

A cleanout/distal monitoring port is installed on the terminal end of each of the lateral lines. The lateral lines can readily be cleaned, flushed, and jetted.

GeoMat increases removal of BOD, TSS, pathogens, and nutrients such as nitrogen and phosphorus. When used with 12" ASTM C33 sand placed directly under the mat, GeoMat provides maximum treatment of effluent and infiltration of wastewater into soil.

GeoMat is 39" wide. It is 1" high. It is shipped in 100-foot rolls that weigh 59 pounds.

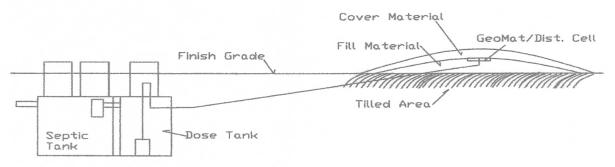


Figure 1: Cross section of a GeoMat mound system

2. Filters: 1 Required. The septic tank effluent filter is optional. The PSI filter provides protection for all distribution systems from suspended solids and is required.

3. **Orifice Shields.** This orifice shield is designed for holes that point down. All orifices point down. Orifice shields are designed to protect the discharge holes in pressurized systems from the outside. The GeoMat POWTS Treatment System is designed with specific flow rates and pressure heads to obtain even distribution to the leach field. Placing the shield over the pipe is easy and no part of the shield can block the distribution hole.

III. DEFINITIONS

- A. "Basal Area" means the effective in situ soil surface area available for infiltration of partially treated effluent from the fill material.
- B. "Deflection of distribution cell" means the ratio between the maximum distance between the down slope edge of the concave distribution cell to the length of the perpendicular line that interests the furthest points of the contour line along the down slope edge of the distribution cell.
- C. "Distribution cell area" means the area within the mound where the effluent is distributed into the fill material.
- D. "Fill material" means sand that meets the specifications of ASTM C33 for fine aggregate and is used along the sides of and under the distribution cell to provide treatment of effluent.
- E. "Limiting factor," means high groundwater elevation or bedrock.
- F. "Mound" means an onsite wastewater treatment and dispersal component. The structure contains a distribution cell area surrounded by, and elevated above, the original land surface by suitable fill material. The fill material provides a measurable degree of wastewater treatment and allows effluent dispersal into the natural environment under various degrees of soil permeability.
- G. "Original Grade" means that the land elevation immediately prior to construction of the mound system.
- H. "Parallel to the surface grade contours on sloping sites" means the mound is on a contour except that a 1% cross slope is allowed along the length of the mound. See Ch. SPS 383 Appendix A-383.44 ORIENTATION (6).
- I. "Permeable Soil" means soil with textured classifications according to the U.S. Department of Agriculture, Natural Resource Conservation Service, classification system of silt loams to gravelly medium sand.
- J. "Slowly permeable soil" means soil with textured classifications according the U.S. Department of Agriculture, Natural Resource Conservation Service, classification system of clay loams and silty clay loams that exhibit a moderate grade of structure; and loams, silt loams, and silts with weak grades of structure; or soils with weak to moderate grades of platy structure.
- K. "Unsaturated flow" means liquid flow through a soil media under a negative pressure potential. Liquids containing pathogens and pollutants come in direct contact with soil/fill material microsites, which enhance wastewater treatment by physical, biological, and chemical means.
- L. "Vertical separation" means the total depth of unsaturated soil that exists between the infiltrative surface of a distribution cell and limiting factor (as by redoximorphic features, groundwater or bedrock)
- M. "Vertical Flow" means the effluent flow path downward through soil or fill material, which involve travel along soil surfaces, or through soil pores.

IV. SOIL AND SITE REQUIREMENTS

Every mound design is ultimately matched to the given soil and site characteristics.

The design approach is based on criteria that all applied wastewater is successfully transported away from the component, in a manner that will not affect later wastewater additions, and the effluent is ultimately treated.

QUALIFICATIONS

- 1. <u>Soil Evaluation.</u> A person who holds a certified soil tester credential number under s. SPS 305.33 Wis. Adm. Code.
- 2. <u>Site Evaluation</u>. A site evaluation shall be performed by a registered architect, professional engineer, designer of plumbing systems, designer of private sewage systems or land surveyor, a certified soil tester or POWTS inspector, or a licensed master plumber or master plumber-restricted service.
- 3. <u>Soil Saturation Determinations.</u> Soil saturation determinations may only be conducted and reported by an individual who is a certified soil tester.

V. FILL AND COVER MATERIAL

- (a) <u>Fill Material</u> The fill material and its placement is one of the most important components of the mound system. Quality control of the fill material is critical to system performance; each truckload of material must meet specifications of the fill.
 - Determining whether a proposed fill material is suitable or not requires that a textured analysis be performed. The standard method used for performing this analysis conforms to ASTM C-136. "Method for Sieve Analysis of Fine and Course Aggregates, and ASTM E-11." "Specifications for Wire-Cloth Sieves for Testing Purposes. Annual Book of ASTM Standards, Volume 04.02." Information for obtaining these methods can be obtained from Methods of Soil Analysis Part 1, C. A. Back, ed., ASA Monograph #9, American Society of Agronomy, Inc., 1975.
- (b) Cover Material The cover material is a soil that will allow air exchange while promoting plant growth. The gas exchange will increase the treatment performance of the system by providing oxygen to the wastewater to help ensure aerobic conditions in the mound system. The plant growth will provide frost protection in the winter season. Clays may not be used for cover material, as they will restrict oxygen transfer. Often, excavated soil from the site can be used. Seeding or other means must be done to prevent erosion of the mound.

VI. DESIGN

- (1) <u>Design Requirements</u> Design of GeoMat Component Systems must be completed utilizing the GeoMat component manual
- (2) Location, Size, and Shape Placement, sizing and shaping of the GeoMat mound and the distribution cell within the mound must be in accordance with this manual. The means of pressurizing the distribution network must provide equal distribution of the wastewater. A pressurized distribution network using a method of sizing as described in either Small Scale Waste Management Project publication 9.6, entitled "Design of Pressure Distribution Networks for Septic Tank Soil Absorption System" or Department of Safety and Professional Services "Pressure Distribution Component Manual for Private Onsite Wastewater Treatment Systems" is acceptable.
- (3) Component Design Design of the GeoMat mound system is based upon the design wastewater flows and soil characteristics. It must be sized such that is can accept the design wastewater flow without causing surface seepage or groundwater pollution. Consequently, the basal area, which is the in situ soil area beneath the fill, must be sufficiently large enough to absorb the effluent into the underlying soil. The system also must be designed to avoid encroachment of the water table into the required minimum unsaturated zone.

Design of the mound includes the following three steps: (A) calculating wastewater flow per SPS 383.43(3) (b), (B) design of the distribution cell within the fill, (C) design of the entire mound. This includes calculating the total width, total length, system height, and distribution lateral location and observation pipes.

Step A: <u>Design Wastewater Flow Calculations</u>
One and two-family dwellings
150 gal/day/bedroom

Public Facilities

Distribution cell size for public facilities application is determined by calculating the DWF using Table 4 in this manual.

Sizing –GeoMat Systems for Public Facilities is done on an individual site basis

Step B. <u>Design of the Distribution Cell</u> – This section determines the required infiltrative surface area of the distribution cell/fill interface, as well as the dimensions of the dimensions of the distribution network within the fill.

<u>Sizing the Distribution Cell</u> – The design-loading rate of the infiltrative surface of the distribution cell is: $\leq 2.0 \text{ gal/day/sq.ft.}$

<u>Design of the Distribution Cell</u> – The minimum bottom area of the distribution cell is determined by dividing the design wastewater flow per day by the design-loading rate of the fill material. As specified in Table 1, the design-loading rate of the infiltration surface of the distribution cell is: $\leq 2.0 \, \text{gal/day/sq}$. ft.


Using the information above, the infiltrative surface area of the distribution cell is determined by using formulas 5 and 6.


Formula 5

Area = DWF \div by design loading rate of the fill material.

For concave systems the actual distribution cell length must be checked to determine if the cell area is sufficient. See Step B2 for further information.

Figure 2
Design Plan View of a Mound

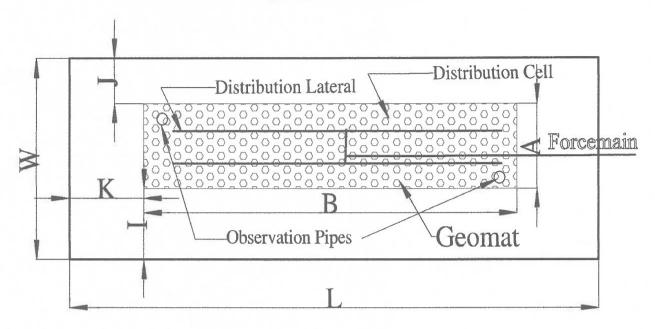

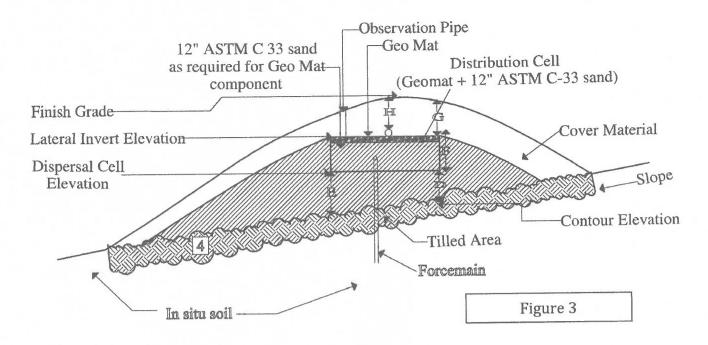

 System Configuration – The distribution cell must be longer than it is wide. GeoMat maximum width is 117" (three 39" wide mats placed side-by-side). The maximum length of a distribution cell is dependent upon setback requirements and soil evaluation.

The distribution cell is aligned with its longest dimension parallel to surface grade contours on sloping sites as required by the specifications of this package so as not to concentrate the effluent into a small area as it moves laterally down the slope.

The dimensions of the distribution cell are calculated using Formulas 6 or 7. Formula 6 is used when the in situ soil has a soil application rate of greater than 0.3-gal/sq. ft./day. Maximum linear loading rate is 10 gal/sq.ft./day.

Formula 7 must be used to check for linear loading rate for the system when the in situ soil within 12" of the fill material has a soil application rate of ≤ 0.3 gal/sq.ft. /day the linear loading rate may not exceed 4.5 gal/sq.ft. /day.

Formula 6

Area of distribution cell = $A \times B$

Where: A = Distribution cell width:(Individual GeoMat cell width is 39" - Max. Allowed is 117")

B = Distribution cell length
*Use formula 7 to confirm linear loading rate is ≤10 gal/sq.ft. /day.

Formula 7 Linear Loading Rate = DWF ÷ B

Where DWF = Design wastewater flow

B = Distribution cell length

2. Concave Mound Configuration – the maximum deflection of a concave distribution cell of a mound system is 10%. The percent of deflection of a distribution cell is determined by dividing the amount of deflection by the effective distribution cell length of the concave distribution cell. The deflection is the maximum distance between the down slope edges of a concave distribution cell to the length of a perpendicular line along the down slope edge of the distribution cell. The effective distribution cell length of the concave distribution cell is the distance between the furthest points along the contour line of the down slope edge of the concave distribution cell. See Figures 4 and 5.

The deflection of the distribution cell on concave slopes is calculated using Formula 8.

Formula 8

Percent of Deflection = (Deflection ÷ Effective distribution cell length) x 100

Where: Deflection = Maximum distance between the down slope edge of a concave distribution cell to the length of a perpendicular line that intersects furthest points of the contour line along the down slope of the distribution cell.

Effective cell distribution length = Distance between the furthest points along the contour line of the down slope edge of the concave distribution cell.

100 = Conversion factor

The actual distribution cell length must be checked to determine if the cell area is sufficient. The actual distribution cell length is calculated using Formula 9.

Formula 9

Actual distribution cell length = $[{\% \text{ of deflection } x 0.00265}] + 1] x effective distribution cell length.$

Where: % of deflection = determined by Formula 8

0.00265 = Conversion factor from percent to feet 1 = Constant

Percent of deflection = (Deflection / Effective Cell Length) x 100





Figure 4- Simple Concave Distribution Cell

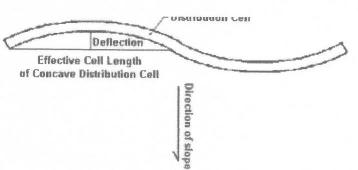

Percent of deflection – (Deflection / Effective Cell Length of Concave Distribution Cell) x 100

Figure 4A-Complex concave distribution cell

Step C. Sizing the Mound

1. Mound Height - The mound height on sloping sites is calculated using Formula 10.

Formula 10

Mound Height = [(D + E) divided by 2] + F + H

Where D = Sand fill depth

E = Down slope fill depth

F = Geo Mat Component depth 1" + 12" of ASTM C-33sand + Nominal pipe size

H = Cover material depth

- 2. Sand Fill Depth The depth of additional sand fill under the Geomat distribution cell is based on the minimum depth of unsaturated soil required from treatment listed in Table 383.44-3, WI Adm. Code, and table 2 of this manual. Under the 12" of sand fill required for the Geomat Component, any additional sand fill that is required is on an inch by inch basis. So that if 24" of suitable in-situ soil is available, then D = 0". If 20" of in-situ soil is available, then D = 4".
- 3. For sloping sites the fill depth below the down slope edge of the distribution cell (E) > D + $\{\% \text{ slope of original grade as decimal } x \text{ width of distribution cell (A)} \}$
- 4. Geo Mat component Cell Depth GeoMat 1" + Nominal Pipe size + 12" ASTM C33 sand
- 5. <u>Cover Material</u> The cover material (G + H) provides frost protection and a suitable growth medium for vegetation. The design uses 12" above the distribution pipe (H) and 6" above the outer edge of the distribution cell (G).
- 6. Fill Length and Width The length and width of the fill are dependent upon the length and width of the distribution cell, fill depth and side slopes of the fill. Side slopes may not be steeper than 3:1 over the basal area, (i.e. 3' of run to every 1' of rise). Soil having textures other than those specified or the fill media may be used to make the slopes greater than the required 3:1 slopes, once the 3:1 slope exists with the fill material. The distribution cell length is generally perpendicular to the direction of the slope so the effluent is spread out along the contour.

The fill length consists of end slopes (K) and the distribution cell length (B). The fill width consists of the up slope width (j), the distribution cell width (A), and the down slope width (I) is greater than on a level site to the 3:1 side slope (see Figure 2). To calculate the up slope and down slope widths when a 3:1 side slope is maintained, multiply the calculated

width by the correction factor found by using the following equations or the correction factor listed in Table 5.

Up slope correction factor = $100 \div [100 + (3 \times \% \text{ of slope})]$ Down slope correction factor = $100 \div [100 - (3 \times \% \text{ of slope})]$ The most critical dimensions of the fill are: fill depths (D) & (E), distribution cell length (B), distribution cell width (A), and the down slope width (I).

End slope width (K) – Total fill at center of distribution cell $\{[(D + E) \div 2] + F + H\}$ x horizontal gradient of selected side slope width (I).

Fill width (L) = Distribution cell length (B) + $2 \times 2 \times 10^{-2} = 10^{-2} \times 10^{-2} \times 10^{-2}$


<u>Up slope width (I)</u> – Fill depth at up slope of distribution cell (D + F + G) x horizontal gradient of side slope (3 if 3:1) x slope correction factor $\{100 \div [100 - (3 \times \% \text{ of slope})] \text{ if 3:1}\}$

Down slope width (I) – Fill depth at up slope of distribution cell (E + F + G) x horizontal gradient of side slope (3 if 3:1) x slope correction factor $\{100 \div [100 - (3 \times \% \text{ of slope})] \text{ if 3:1}\}$

 $Fill\ width\ W = Up\ slope\ width\ (J) + down\ slope\ width\ (I) + width\ of\ distribution\ cell\ (A)$

These calculations result in the fill material extending at least 6" horizontally from the top edges of the distribution cell as noted in Figure 3.

Cross Section of a Mound System

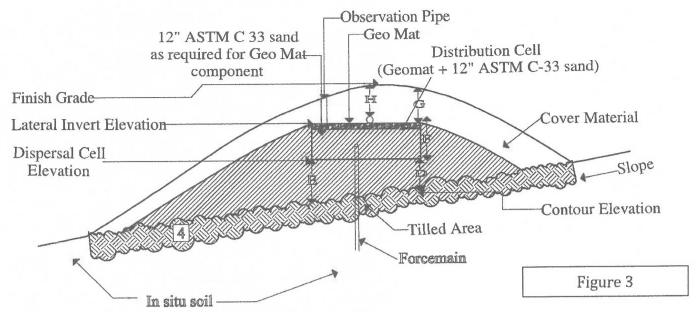

7. <u>Basal Area</u> – The basal area is the in situ soil/fill interface between the soil and the fill material. Its function is to accept the effluent from the fill, assist the fill in treating the effluent, and transfer the effluent to the subsoil beneath the fill or laterally to the subsoil outside of the fill.

The soil infiltration rate of the in situ soil determines how much basal area is required. When the wastewater applied to the mound has values for bod $_5$ and TSS of < 30 mg/L or if there is at least 12" of fill material (as part of Geomat Component) beneath the distribution cell the soil application rate for the basal area is specified in table SPS 383.44-1 Column 2.

For level sites, the total basal area, excluding end shape area [length of distribution cell (B) x width of fill and cover (W) beneath the fill and soil cover is available for effluent absorption into the soil (see Figure 5a).

For sloping sites, the available basal area is the fill and soil cover or (A + I) times the length of the distribution cell (B) (see Figure 5b.). The up slope width and end slopes are not included as part of the total basil area.

It is important to compare the required basal area to the available basal area. The available basal area must be equal to or exceed the required basal area.

8. Outside of the fill.

The soil infiltration rate of the in situ soil determines how much basal area is required. When the wastewater applied to a Geo Mat component mound has values for BOD5 and TSS of ≤ 30 mg/L or when there is at least 12" of ASTM 33 sand material beneath the Geo Mat distribution material (Also called the Geo Mat component) the soil application rate for the basal area is determined using Table SPS 383.44-2. Column 2.

For level sites, the total basal area, excluding end shape area [length of distribution cell (B) x width of fill and cover (W) beneath the fill and soil cover is available for effluent absorption

into the soil (see Figure 5a). For sloping sites, the available basal area is the fill and soil cover or (A + I) times the length of the distribution cell (B) (see Figure 5b.). The up slope width and end slopes are not included as part of the total basal area.

It is important to compare the required basal area to the available basal area. The available basal area must be equal to or exceed the required basal area.




Figure 5A Level Site




Figure 5B One direction slope

Basal area required = DWF + Infiltration rate of in situ soil

Basal area available = $B \times W$ on a level site or = $B \times (A + I)$ on a sloping site.

If sufficient area is not available for the given design and site conditions, corrective action is required to increase (J) and (I) on level sites or (I) on sloping sites.

9. <u>Location of the observation pipes.</u>

- See Table 3 Page 7 of this manual
- Observation pipes must be located at each end of the distribution cell. Special care
 must be taken to make sure GeoMat is continuous and not separated to install
 Observation Pipe. Use zip ties to but material together. Have extra filter fabric to
 cover joints. Use a heavy blade or utility knife to create holes for observation pipe.
 See Figure 7.

Step D. <u>Distribution Network and Dosing System</u> – A pressurized distribution network based on a **method of sizing** as described either Small Scale Waste Management Project publication 9.6 entitled "Design of Pressure Distribution Networks for Septic Tank – Soil Absorption Systems" or the Department of Safety and Professional Services "pressure Distribution Component Manual for Private Onsite Wastewater Treatment Systems" is acceptable.

| | Table 5 | |
|------------|------------------------|---------------------|
| Down slope | and up slope width cor | rection factors |
| Slope % | Down slope | Up Slope correction |
| 1 | correction factor | factor |
| 0 | 1.00 | 1.00 |
| 1 | 1.03 | 0.97 |
| 2 | 1.06 | 0.94 |
| 3 | 1.10 | 0.915 |
| 4 | 1.14 | 0.89 |
| 5 | 1.18 | 0.875 |
| 6 | 1.22 | 0.85 |
| 7 | 1.27 | 0.83 |
| 8 | 1.32 | 0.81 |
| 9 | 1.37 | 0.79 |
| 10 | 1.43 | 0.77 |
| 11 | 1.49 | 0.75 |
| 12 | 1.56 | 0.735 |
| 13 | 1.64 | 0.72 |
| 14 | 1.72 | 0.705 |
| 15 | 1.82 | 0.69 |
| 16 | 1.92 | 0.675 |
| 17 | 2.04 | 0.66 |
| 18 | 2.17 | 0.65 |
| 19 | 2.33 | 0.64 |
| 20 | 2.50 | 0.625 |
| 21 | 2.70 | 0.61 |
| 22 | 2.94 | 0.60 |
| 23 | 3.23 | 0.59 |
| 24 | 3.57 | 0.58 |
| 25 | 4.00 | 0.57 |

MOUND PLACEMENT CONSIDERATIONS

- (1) <u>Design Flows</u> Listed in Table 1: Influent Flows and Loads.
- (2) <u>Minimum Soil Requirements</u> Listed in Table 2: Size and Orientation

(3) Other Site Considerations -

<u>Slopes</u> – The slope on which a GeoMat mound is to be installed may not indicate the
direction of the groundwater movement. If there is a determination that the
direction of the groundwater movement is different from the slope of the land, the
direction of groundwater movement must be considered during mound design.

On a crested site the fill can be situated such that the effluent can move laterally down the slopes. A level site allows lateral flow in all directions, but may present problems as the water table could rise higher beneath the fill in slowly permeable soils. The sloping site allows the water to move in one direction away from the fill. Figure 3 shows a cross-section of a mound and the effluent movement in a slowly permeable soil on a sloping site. Systems that installed on a concave slope may have a deflection that does not exceed that allowed in Table 2.

Mound components rely on lateral effluent movement through the upper soil horizons. Lateral movement becomes more important as soil permeability decreases.

- Mound location In open areas, exposure to sun and wind increases the assistance of evaporation and transpiration in the dispersal of the wastewater.
- Sites with trees and large boulders Generally, sites with large trees, numerous smaller tress or large boulders are less desirable for installing a mound system because of difficulty in preparing the surface and reduced infiltration beneath the mound. Areas that are occupied with rock fragments; tree roots, stumps and boulders reduce the amount of soil available for proper treatment. If no other site is available, trees in the basal area of the mound must be cut off at ground level. A larger fill area is necessary when any of the above conditions are encountered, to provide sufficient infiltrative area.
- <u>Setback distances</u> Per Table SPS 383.43-1 are measured from the basal area except for wells, which are measured from the outer edges of the cover material as per chs, NR 811 and 812.

VII. SITE PREPERATION AND CONSTRUCTION OF A GEOMAT MOUND

Construction Plan

- 1. <u>Soil Conditions</u> Soil shall only be tilled when it is not frozen and the moisture content is low to avoid compaction and smearing. Remove any loose organic matter, which can interfere with infiltration.
- 2. <u>Equipment</u> Proper equipment is critical. Track type equipment that will not compact the mound or the down slope are required.
- 3. Sanitary Permit Prior to the construction of the system, a sanitary permit, obtained for the installation must be posted in a clearly visible location on the site. Arrangements for inspection(s) must also be made within the department or government unit issuing the sanitary permit.

Construction Procedures

- 1. Check the moisture content of the soil to a depth of 8". Smearing and compacting of wet soil will result in reducing the infiltrative capacity of the soil. Proper soil moisture can be determined by rolling a soil sample between the hands. If the soil rolls into a ¼" wire, the site is to wet to prepare. If it crumbles, site preparation can proceed. If the site is to wet to prepare, do not proceed until it dries.
- 2. Lay out the fill area on the site so the distribution cell runs perpendicular to the direction of the slope.
- 3. Establish the original grade elevation (surface contour) along the top edge of the distribution cell. The elevation is used throughout the mound construction as a reference to determine the bottom of the distribution cell. Lateral elevations, etc., and is referenced to the permanent benchmark for the project. A maximum of 4" of fill may be tilled into the surface.
- 4. Determine where the force main from the dosing chamber will connect to the distribution system in the distribution cell. Place the pipe either before tilling or after placement of the fill. If the force main is to install in the down slope area, the trench for the force main may not be wider than 12".
- 5. Cut trees flush to the ground and leave stumps, remove surface boulders that can be easily rolled off, remove vegetation over 6" long by mowing and removing cut vegetation. Prepare the site by breaking up, perpendicular to the slope, the top 8" so as to eliminate any surface that could impede the vertical flow of liquid into the in situ soil. When using a moldboard plow, it should have as many bottoms as possible to reduce the number of passes over the area to be tilled and minimize compaction of the subsoil. Tilling with a moldboard plow is done along the contours. Chisel type plowing is highly recommended, especially in fine textured soils. Rototilling or other means that pulverize the soil is not acceptable. The important point is that a rough, unsmeared surface be left. The sand fill will intermingle between the clods of soil, which improves the infiltration rate into the natural soil.

Immediate application of at least 6" of fill material is required after tilling. All vehicular traffic is prohibited on the tilled area. For sites where the effluent may move laterally, vehicle traffic is also prohibited for 15' down slope and 10' on both sides of level sites. If it rains after tilling is completed, wait until the soil dries out before continuing construction, and contact the local inspector for a determination on the damage done by rainfall.

- 6. Place the approved sand fill material around the edge of the tilled area being careful to leave adequate perimeter area, not covered by the sand fill, on which to place the soil cover. There should be approximately 2' of basal area adjacent to the mound perimeter that is not covered by the sand fill. The area serves to tie the soil cover into the natural surface material that has been tilled and helps seal the toe from leakage. Work from the end and up slope sides. This will avoid compacting the soils on the down slope side, which, if compacted, affects lateral movement away from the fill and could cause surface seepage at the toe of the fill on slowly permeable soils.
- 7. Move the fill material into place using a small track type tractor with a blade or a large backhoe that has sufficient reach to prevent compaction of the tilled area. Do not use a tractor/backhoe having tires. Always keep a minimum of 6" of fill material beneath tracks to prevent compaction of the in situ soil.
- 8. Place the fill material to the required depth.
- 9. Form the distribution cell. Take care to hand level the bottom of the distribution cell.
- 10. Shape the sides with additional fill to the desired slopes.
- 11. Install the GeoMat and pressure piping per instructions, pressure distribution design and application in the GeoMat Mound Design App. Small slits may need to be made in geotextile fabric to install a center manifold. Keep cuts to a minimum. Extra fabric may be used to preserve integrity of fabric.
- 12. At the end of the lateral, place a 90-degree long sweep with a capped piece of pipe pointing up through the soil surface. Cover the capped pipe with a valve box and lid of an adequate size. The cover of the valve box shall be located above the final grade of the mound (Figure 6).





Figure 6



13. Install an observation pipe at each end of GeoMat Cell The slots need to extend from the bottom of the GeoMat (placed flat on top of the sand) to the top of the fabric (approximately 1") See figure 7.

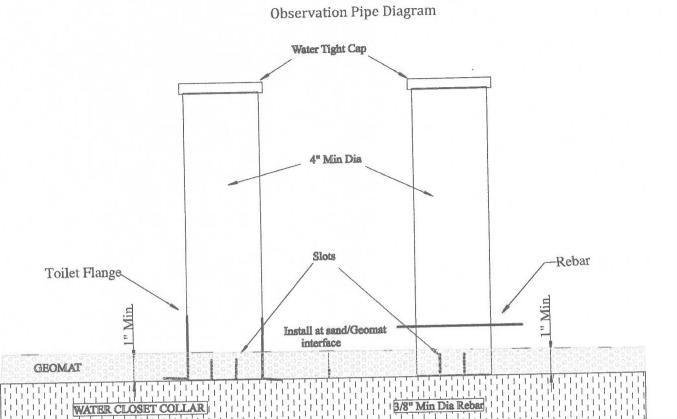

12" ASTM C-33 sand under Geomat

Figure 7

WATER CLOSET COLLAR

14. Complete the final grading to divert surface water drainage away from the mound. Sod or seed the entire mound component.

GeoMat Cross Section

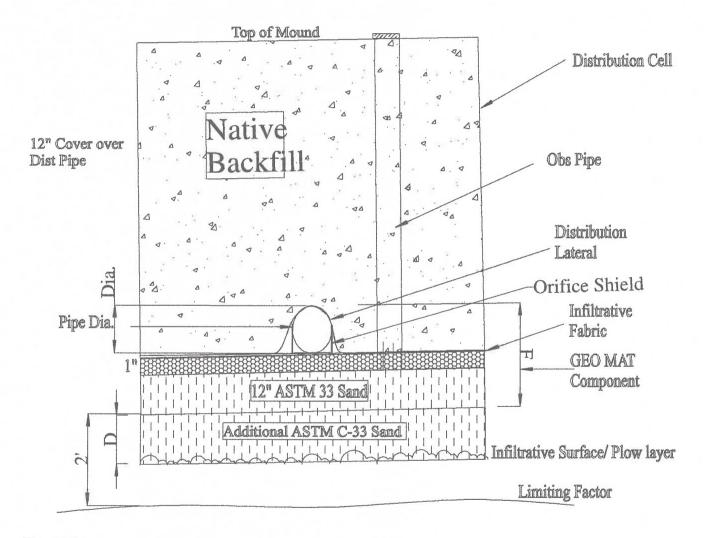


Figure 8

VIII. GEOMAT MOUND WORKSHEET

A. SITE CONDITIONS

Evaluate the site and soils for the following:

- Surface water movement.
- Measure elevations and distances on the site so that slope, contours, and available areas can be determined.
- Determine the limiting conditions such as bedrock, high groundwater level, soil application rates, and setbacks.

| Slope | % |
|----------------------------|--|
| Occupancy - | One or two-family dwelling (number of bedrooms) |
| Public facility | gallons per day (Estimated water flow) |
| Depth to limit | ting factorinches |
| | oth of unsaturated soil required by table 383.44-3, (Column 2) de inches |
| In Situ Soil ap | pplication rate of in situ soil used gal/sq.ft. /day (2nd column) |
| FOG value of | effluent applied to component ≤mg/L |
| BOD5 value o | f effluent applied to component ≤mg/L |
| TSS value of e | effluent tied to component ≤mg/L |
| Fecal coliforn | n monthly geometric mean value of effluent tied to component $\geq 10^4$ CFU $/100$ mg |
| Yes | No |
| Type of Dist. (| CellGeoMat |
| B. DESIGN W | ASTEWATER FLOW |
| One and two- | family dwelling |
| Combined wa | stewater flow: |
| DWF = 150 | gal/day/ bedroom x number of bedrooms |
| = 150 gal/day | //bedroom x # of bedrooms |
| = 150 gal/day | //bedroom xbedrooms |
| = 450 gal/day Clearwate | er and greywater only: |
| DWF | = 90 gal/day/bedroom x # of bedrooms = 90 gal/day/bedroom x # of bedrooms |
| | = gal/day |

| | DWF | = 60 gal/day/bedroom x # of bedrooms |
|----|------------------------|--|
| | | = 60 gal/day/bedroom x # of bedrooms |
| | | = gal/day |
| | Public Faci | ilities |
| | DWF | = Estimated wastewater flow x 1.5 |
| | | = gal/day x 1.5 |
| | | = gal/day |
| C. | DESIGN OF | THE DISTRIBUTION CELL |
| 1. | Total size | of the Distribution cell(s) area |
| | a. Loading | grate of fill material = $__$ ≤ 1.0 gal/sq.ft./day if BOD5 or TSS ≥ 30 mg/L |
| | or | = $X \le 2.0 \text{ gal/sq.ft./day if BOD5 or TSS} \le 30 \text{ mg/L}$ |
| | b. Bottom determine | area of distribution cell = Design wastewater flow \div loading rate of fill material as d in C.1 a. |
| | Distribution | on cell area = $_$ gal/day÷ $_$ 2.0 gal/ft²./day |
| | Distributio | on cell area = ft² |
| 2. | Distribution | on Cell Configuration OPTIONS—3.25', 6.5', 9.75' |
| | a. Distribi | ution cell width(s) (A) =feet, and the number of distribution |
| | cells = | _cells. |
| | b. Distrib | ution cell length (B) = Bottom area of distribution cell \div width of distribution cell. |
| | B = | _ ft². ÷ (Distribution cell area required) ÷ft. (A) |
| | B = | orft |
| | c. Check d | listribution cell length (B) |
| | For linear | loading rate |
| | Linear loa | ding rate ≤ Design wastewater flow ÷ Cell length (B) or effective cell length for a nound. |
| | Linear loa | ding rate ≤gal/day ÷feet |
| | | |

Blackwater only:

| | Linear loading rate ≤gal/ft/day |
|----|--|
| | Linear loading rate for systems with in situ soils having a soil application rate of \leq 0.3 gal/ft²/day within 12 inches of original grade must be less than or equal to 4.5 gal/ft/day. |
| | Linear loading rate for systems with in situ soils having a soil application rate of > 0.3 gal/ft²/day within 12 inches of original grade must be less than or equal to 10 gal/ft/day. |
| | Is the linear loading rate \leq what is allowed?Yes NoIf no, then the length and width of the distribution cell must be changed so it does. |
| | Distribution cell length B = Design Wastewater Flow ÷ Maximum Linear Loading Rate |
| | Distribution cell length B = gal/day ÷ gal/ft/day |
| | Distribution cell length B = ft. |
| | Distribution cell total width (A) = sq. ft. (Distribution cell area) ÷ ft. (B) |
| | Distribution cell total width (A) =ft. |
| | d. Check percent of deflection and actual length of concave distribution cell length |
| | Percent of deflection = Deflection ÷ effective distribution cell length x 100 |
| | Percent of deflection = ft. ÷ ft. x 100 |
| | Percent of deflection = % (≤ 10%) |
| | Actual distribution cell length = $[\{___$ % of deflection x 0.00265 \div 1] x effective distribution cell length |
| | Actual distribution cell length = $[\{___ \% \times 0.00265 \div 1] \times ___$ ft. |
| | Actual distribution cell length =ft. |
| D. | DESIGN OF THE ENTIRE MOUND AREA |
| | 1. Fill Depth a. The depth of additional sand fill under the Geomat distribution cell is based on the minimum depth of unsaturated soil required from treatment listed in Table 383.44-3, WI Adm. Code, and table 2 of this manual. Under the 12" of sand fill required for the Geomat Component, any additional sand fill that is required is on an inch by inch basis. So that if $24'$ of suitable in-situ soil is available, then $D = 0$ ". If 20 " of in-situ soil is available, then $D = 4$ ". |
| | 2) Depth at up slope edge of distribution cell (D) = distance required by Table 383.44-3 (column 2), WI Adm. Code minus distance in inches to limiting factor. |
| | D = inches inches |
| | D =inches |

| 3) Depth at down slope of distribution cell (E) |
|--|
| $E = Depth \ at \ up \ slope \ of \ distribution \ cell \ (D) + (\% \ natural \ slope \ expressed \ as \ a \ decimal \ x \ distribution \ cell \ width \ (A)$ |
| E = D + (% natural slope expressed as decimal x A) |
| E = inches ÷ (x feet x 12 inches/ft) |
| E =inches orinches |
| 4) Distribution cell depth for Geo Mat Component Distribution Cell. |
| Distribution cell component depth (F) for GEO MAT distribution cell = Depth of GeoMat Material (1")+ normal outside diameter of the largest lateral + 12" of ASTM 33 sand |
| F =(1) inch + inches + 12" ASTM sand |
| F =inches |
| 5) Cover material |
| a) Depth at distribution cell center (H) \geq 12 inches |
| b) Depth at distribution cell edges (G) \geq 6 inches |
| 6) Mound Length |
| a. End slope with (K) = Total fill at center of distribution cell x horizontal gradient of side slope. |
| $K = \{([(D + E) \div 2] + F + H) \times \text{horizontal gradient of side slope}) \div 12 \text{ inches/foot}\}$ |
| $K = \{([(\underline{\hspace{1cm}} + \underline{\hspace{1cm}} inches \div 2] + \underline{\hspace{1cm}} inches + \underline{\hspace{1cm}} inches) \times \underline{\hspace{1cm}}) \div 12$ $Inches/foot$ |
| K = orft. |
| b. Mound length (L) = Distribution cell length + $(2 \times 2 + 2 \times $ |
| L = B + 2K |
| $L =ft. + (2 \timesft.)$ |
| L =feet |
| 7) Mound width |
| a. Up slope width (J) = Fill depth at up slope edge of distribution cell (D + F + G) x Horizontal gradient of side slope x Slope correction factor (100 \div [100 + (gradient side slope x % of slope or value from Table 5)]} |

| $J = (D + F + G) \times \text{horizontal gradient of side slope} \times \text{Slope correction factor 100 + [100 + G)} $ (gradient of side slope x % of slope or value from Table 5)]} |
|---|
| $J = (in. +in. +in) \div 12 in/ft xx 100 \div [100 + (3x6)] or [Table 5 value]$ |
| J = feet |
| b. Down slope width (I) = Fill depth at down slope edge of distribution cell (E + F + G) x Horizontal gradient of side slope x Down slope correction factor $\{100 + [100 - (gradient of side slope or value from Table 5)]\}$ |
| $I = (E + F + G) \times Horizontal gradient of side slope x Down slope correction factor {100 + [100 - (gradient of side slope x % of slope or value from table 5)}]$ |
| $I = (\underline{ in. + \underline{ in.}} \div 12 \text{ in/ft x } 3 \text{ x } 100 \div [100 - \underline{3} \text{ x } \underline{6}]$ |
| $I = in \div 12 in/ft \times 3 \times 100 \div$ |
| I = ft or ft |
| c. Mound width (W) = (Up slope width (J) + Distribution cell width (A) + Down slope width (I) |
| W = J + A + I |
| W =ft. +feet |
| W =feet |
| 8) Check the basal area |
| a. Basal area required = Daily wastewater flow + soil application rate of in situ soil (the soil application rate may be that which is listed for BOD5 and $TSS \ge \text{or} \le 30 \text{ mg/L}$ depending on wastewater characteristics or fill depth below distribution cell. See Table 1.) |
| = gal/day ÷ gal/sq.ft. /day |
| =sq. ft. |
| b. Basal area available |
| 1) Sloping site = Cell length (B) x [(# of cells x cell width) + ({# of cells - 1} x cell spacing) + down slope width (A + I) |
| $= ft x [(x ft) + (\{ 1 - 1] x 0 ft) + ft)$ |
| =ft x (ft. + 0 ft. +ft.) |
| = ft x ft |
| =ft ² |
| 2) Level site = Cell length (B) x total mound width (W) |

| =ft x ft |
|--|
| = ft ² |
| c. Is available basil area sufficient? Yes X No |
| If yes, FINAL MOUND DIMENSIONS |
| L =' W =' |
| Basal area required - Basal Area Available |
| sq. ft ft ² |
| |
| The available down slope must be increased by ft ² This can be |
| accomplished by increasing the down slope width (I) byft, making it |
| ft. See d. for recalculation of basal area. |
| d. Basal area available |
| 1) Sloping site = Cell length (B) x [{# of cells x cell width) + ({[# of cells - 1} x cell spacing) + down slope width (A + I) |
| $=ft \times [(1xft) + (1-1] \times 0 ft) +ft)$ |
| =ft x (ft. + 0 ft. +ft.) |
| = ft x ft |
| =ft ² |
| 2? Level site = Cell length (B) x total mound width (W) |
| = ft. x ft. |
| c.2 |

IX. GEOMAT MOUND WORKSHEET EXAMPLE

A. SITE CONDITIONS

Evaluate the site and soils for the following:

- Surface water movement.
- Measure elevations and distances on the site so that slope, contours, and available areas can be determined.
- Determine the limiting conditions such as bedrock, high groundwater level, soil application rates, and setbacks.

| Slope - <u>6</u> % |
|---|
| Occupancy – One or two-family dwelling <u>3</u> (number of bedrooms) |
| Public facility gallons per day (Estimated water flow) |
| Depth to limiting factor25 inches |
| Minimum depth of unsaturated soil required by table 383.44-3, (Column 2) Wis. Adm. Code 24 inches |
| In Situ Soil application rate of in situ soil used <u>0.6</u> gal/sq.ft. /day (2nd Column) |
| FOG value of effluent applied to component $\leq 30 \text{ mg/L}$ |
| BOD5 value of effluent applied to component ≤ <u>180</u> mg/L |
| TSS value of effluent tied to component ≤ 50 mg/L |
| Fecal coliform monthly geometric mean value of effluent tied to component $\geq 10^4$ CFU /100mg |
| XYesNo |
| Type of Dist. CellGeoMat |
| B. DESIGN WASTEWATER FLOW |
| One and two-family dwelling |
| Combined wastewater flow: |
| DWF = 150 gal/day/ bedroom x number of bedrooms |
| = 150 gal/day/bedroom x # of bedrooms |
| = 150 gal/day/bedroom x <u>3</u> bedrooms = 450 gal/day |
| Clearwater and greywater only: |
| DWF = 90 gal/day/bedroom x # of bedrooms = 90 gal/day/bedroom x # of bedrooms |

= gal/day

Blackwater only:

DWF

= 60 gal/day/bedroom x # of bedrooms

= 60 gal/day/bedroom x _____ # of bedrooms

= gal/day

Public Facilities

DWF

= Estimated wastewater flow x 1.5

= ____ gal/day x 1.5

= _____ gal/day

C. DESIGN OF THE DISTRIBUTION CELL

3. Total size of the Distribution cell(s) area

a. Loading rate of fill material = $__$ ≤ 1.0 gal/sq.ft./day if BOD5 or TSS ≥ 30 mg/L

or $= X \le 2.0 \text{ gal/sq.ft./day if BOD5 or TSS} \le 30 \text{ mg/L}$

b. Bottom area of distribution cell = Design wastewater flow ÷loading rate of fill material as determined in C.1 a.

Distribution cell area = 450 gal/day÷ 2.0 gal/ft²./day

Distribution cell area = 225 ft²

4. Distribution Cell Configuration

OPTIONS-3.25', 6.5', 9.75'

a. Distribution cell width(s) (A) = $\underline{6.50}$ feet and the number of distribution

cells = 1 cells.

b. Distribution cell length (B) = Bottom area of distribution cell ÷ width of distribution cell.

 $B = 225 \text{ ft}^2$. ÷ (Distribution cell area required) ÷ 6.50 ft. (A)

B = 34.62 or 34.7 ft

c. Check distribution cell length (B)

For linear loading rate

Linear loading rate \leq Design wastewater flow \div Cell length (B) or effective cell length for a concave mound.

Linear loading rate ≤ 450 gal/day $\div 34.7$ feet Linear loading rate ≤ 13.0 gal/ft/day Linear loading rate for systems with in situ soils having a soil application rate of ≤ 0.3 gal/ft²/day within 12 inches of original grade must be less than or equal to 4.5 gal/ft/day. Linear loading rate for systems with in situ soils having a soil application rate of > 0.3gal/ ft^2 /day within 12 inches of original grade must be less than or equal to 10 gal/ft/day. Is the linear loading rate \leq what is allowed? ____ Yes _X_ No -----If no, then the length and width of the distribution cell must be changed so it does. Distribution cell length B = Design Wastewater Flow ÷ Maximum Linear Loading Rate Distribution cell length B = 450 gal/day ÷ 10.0 gal/ft/day Distribution cell length B = 45 ft. d. Check percent of deflection and actual length of concave distribution cell length Percent of deflection = Deflection ÷ effective distribution cell length x 100 Percent of deflection = _____ ft. ÷ _____ ft. x 100 Percent of deflection = _____ % (≤ 10%) distribution cell length Actual distribution cell length = _____ ft. DESIGN OF THE ENTIRE MOUND AREA 1. Fill Depth a. The depth of additional sand fill under the Geomat distribution cell is based on the minimum depth of unsaturated soil required from treatment listed in Table 383.44-3, WI Adm. Code, and table 2 of this manual. Under the 12" of sand fill required for the Geomat Component, any additional sand fill that is required is on an inch by inch basis. So that if 24" of suitable in-situ soil is available, then D = 0". If 20" of in-situ soil is available, then D = 4". 2) Depth at up slope edge of distribution cell (D) = distance required by Table 383.44-3 (Column 2), WI Adm. Code minus distance in inches to limiting factor. $D = \underline{24}$ inches - $\underline{25}$ inches D = 0 inches

D.

3) Depth at down slope of distribution cell (E)

E = Depth at up slope of distribution cell (D) + (% natural slope expressed as a decimal x distribution cell width (A)

E = D + (% natural slope expressed as decimal x A)

$$E = 0$$
 inches ÷ $(0.06 x 6.50$ feet x 12 inches/ft)

$$E = 4.68$$
 inches or 4.68 inches

4) Distribution cell depth for Geo Mat component Distribution Cell.

Distribution cell Component depth (F) for GEO MAT distribution cell = Depth of GeoMat Material (1")+ normal outside diameter of the largest lateral + 12" of ASTM 33 sand

$$F = 1$$
 (1) inch + 1.5 inches + 12" ASTM sand

$$F = 14.5$$
 inches

- 5) Cover material
- a) Depth at distribution cell center (H) \geq 12 inches
- b) Depth at distribution cell edges (G) \geq 6 inches
- 6) Mound Length
- a. End slope with (K) = Total fill at center of distribution cell x horizontal gradient of side slope.

$$K = \{([(D + E) \div 2] + F + H) \times \text{horizontal gradient of side slope}) \div 12 \text{ inches/foot}\}$$

$$K = \{([(\ \ 0\ inches\ +\ \ 4.68\ \ inches\ \div\ 2]\ +\ \ 14.5\ \ inches\ +\ \ 12\ \ inches)\ x\ \ \ 3\ \)\ \div\ 12$$
 Inches/foot

$$K = 7.21$$
 or 7.21 ft.

b. Mound length (L) = Distribution cell length + $(2 \times 2 \times 1)$

$$L = B + 2K$$

$$L = 45$$
 ft. + $(2 \times 7.21$ ft.)

$$L = 59.42$$
 feet

- 7) Mound width
- a. Up slope width (J) = Fill depth at up slope edge of distribution cell (D + F + G) x Horizontal gradient of side slope x Slope correction factor (100 \div [100 + (gradient side slope x % of slope or value from Table 5)]}

 $J = (D + F + G) \times \text{horizontal gradient of side slope} \times \text{Slope correction factor } 100 + [100 + (gradient of side slope x % of slope or value from Table 5)]}$

$$J = (0 in. + 14.5 in. + 6 in) \div 12 in/ft \times 3 \times 100 \div [100 + (3 \times 6)] \text{ or } [Table 5 \text{ value}]$$

b. Down slope width (I) = Fill depth at down slope edge of distribution cell (E + F + G) x Horizontal gradient of side slope x Down slope correction factor $\{100 + [100 - (gradient of side slope or value from Table 5)]\}$

 $I = (E + F + G) \times Horizontal gradient of side slope x Down slope correction factor {100 + [100 - (gradient of side slope x % of slope or value from table 5)}]$

$$I = (4.68 \text{ in.} + 14.5 \text{ in.} + 6 \text{ in.}) \div 12 \text{ in/ft} \times 3 \times 100 \div [100 - 3 \times 6]$$

$$I = (25.18 \text{ in} \div 12 \text{ in/ft}) \times 3 \times (100 \div 82)$$

$$I = 7.68$$
 ft or 7.7 ft

c. Mound width (W) = (Up slope width (J) + Distribution cell width (A) + Down slope width (I)

$$W = I + A + I$$

$$W = 4.34$$
 ft. + 6.5 ft. + 7.7 feet

$$W = 18.52$$
 feet

- 8) Check the basal area
- a. Basal area required = Daily wastewater flow + soil application rate of in situ soil (the soil application rate may be that which is listed for BODs and $TSS \ge \text{or} \le 30 \text{ mg/L}$ depending on wastewater characteristics or fill depth below distribution cell. See Table 1.)

=
$$450$$
 gal/day ÷ 6 gal/sq.ft. /day

$$= 750$$
 sq. ft.

b. Basal area available

1) Sloping site = Cell length (B) x [(# of cells x cell width) + ({# of cells - 1} x cell spacing) + down slope width (A + I)

$$= 45 \text{ ft x } [(1 \text{ x } 6.5 \text{ ft}) + ((1 - 1) \text{ x } 0 \text{ ft}) + 7.7 \text{ft})$$

$$=$$
 45ft x (6.5 ft. + 0 ft. + 7.7 ft.)

$$=$$
 45 ft x 14.18 ft

$$= 638.1 \text{ ft}^2$$

2) Level site = Cell length (B) x total mound width (W)

| =ft x ft |
|---|
| = ft ² |
| c. Is available basil area sufficient? Yes X No |
| If yes, FINAL MOUND DIMENSIONS |
| L =' W =' |
| If No: |
| Basal area required - Basal Area Available |
| <u>750</u> sq. ft - <u>638.1</u> ft ² |
| = 111.9 Sq FT |
| The available down slope must be increased by <u>111.9</u> ft ² This can be |
| accomplished by increasing the down slope width (I) by $\underline{2.49}$ ft. making it |
| 10.17 ft. See d. for recalculation of basal area. |
| d. Basal area available |
| 1) Sloping site = Cell length (B) x [{# of cells x cell width) + ({[# of cells – 1} x cell spacing) + down slope width (A + I) |
| $= 45 \text{ ft x } [(1 \text{ x } \underline{6.5} \text{ ft}) + ((1 - 1) \text{ x } \underline{0} \text{ ft}) + 10.17 \text{ ft})$ |
| = 45ft x (6.5 ft. + 0 ft. + 10.17 ft.) |
| = 45 ft x 16.67 ft |
| = 750 SQ FT Basal Area |
| 2? Level site = Cell length (B) x total mound width (W) |
| = ft. x ft. = ft ² |

FINAL MOUND DIMENSIONS AFTER DOWNSLOPE TOE EXTENSION

$$L = 59.42'$$
 $W = 21.01'$

X. GEOMAT PLAN SUBMITTAL

A. Plan Submittal

Synergy Systems recommends every plan is prepared for review utilizing the GeoMat Mound System design program.

In addition to the design, the following information is required to be submitted for review:

- Photocopies of soil report forms along with other documents required by the reviewing agent.
- Plans or documents must be originals or permanent copies.

B. Forms and Fees

 Application form for submittal provided by the reviewing agent, along with proper fees required by the reviewing agent.

C. Soils Information

- Complete soil and site evaluation report (Form # SBD-8330) for each soil boring described; signed and dated by Certified Soil Tester, with License Number.
- Separate sheet showing the location of all borings. The location of all boring and backhoe pits must be able to be identified on the plot plan.

D. <u>Documentation</u>

- Architects, engineers, or designers must sign, seal, and date each page of the submittal or provide an index page, which is signed, sealed, and dated.
- Mater Plumbers must sign, date, and include their license number on each page of the submittal or provide an index page, which is signed, sealed, and dated.
- Three complete sets of plans and specifications (clear, permanent, and legible);
 submittals must be on paper measuring at least 8.5 x 11 inches.
- Designs

E. Plot Plan

- Document plans or plans drawn to scale (scale indicated on plans) with parcel size or all property boundaries. Clearly marked.
- Slope directions and percent in system area.
- Benchmark and north arrow.
- Setbacks indicated as per appropriate code.
- Two-foot contours or other appropriate contour interval within the system area.
- Location information, legal description of parcel must be noted.
- Location of any nearby system or well.

F. Plan View

- Dimensions for distribution cells
- Location of observation pipes.
- Dimensions of mound.
- Pipe lateral layout, which must include the number of laterals, pipe material, diameter and length; and number, location and size of orifices.
- Manifold and force main locations, with materials, length and diameter of each.

G. Cross Section of System

- Include tilling requirement, distribution cell details, percent slope, side slope, and cover material.
- Lateral elevation, position of observation pipes, dimensions of distribution cell, and type of cover material such as geotextile fabric, if applicable.

H. System Sizing

- For one and two-family dwellings, the number of bedrooms must be included.
- For public buildings, the sizing calculations must be included.

I. Tank and Pump or Siphon Information

- All construction details for site-construction tanks.
- Size and manufacturer information for prefabricated tanks.
- Notation of pump or siphon model, pump performance curve, friction loss for force main and calculation for total dynamic head.
- Notation of high water alarm manufacturer and model number.
- Cross section of dose tank / chamber to include storage volumes; connections for piping, vents, and power; pump "off" setting; dosing cycle and volume, high water alarm setting; and storage volume above the high water alarm; and location of vent and manhole.
- Cross section of two compartment tanks or tanks installed in a series must include information listed above.
- "Inspection shall be made in accordance with ch. 145.20, Wis. Stats. and s.SPS383.26, Wis. Admin. Code. The inspection form on the following two pages may be used. The inspection of the system installation and/or plans is to verify that the system at least conforms to specifications listed in Tables 1-3 of this manual."